

# MARION COUNTY SURVEYOR'S OFFICE



## SECTION CORNER RECORD

DEBRA S. JENKINS  
MARION COUNTY SURVEYOR

SEC. 4 TWN. 14<sub>N</sub> RNG. 3<sub>E</sub>

BRYAN F. CATLIN, PLS  
TECHNICAL SUPERVISOR

Date: 8-7-09  
Party Chief: Greene  
Crew: Finney  
Type of Marker: Harrison  
Method of Establishment: County: 8-2-1999  
IN S.P.C. E Zone, NAD 83  
Name: 14030404  
N: 492 753.434 2(m)  
E: 52 905.876 7(m)

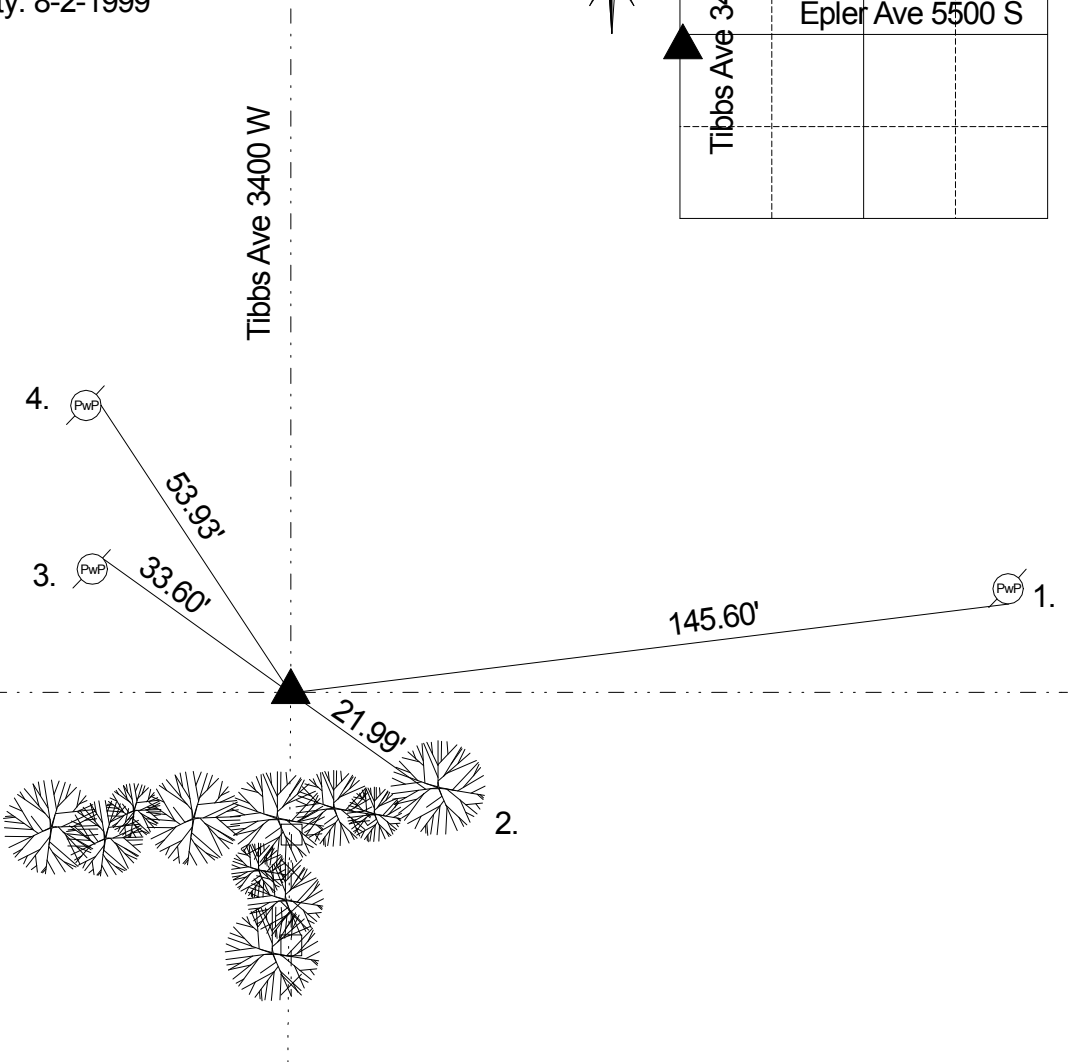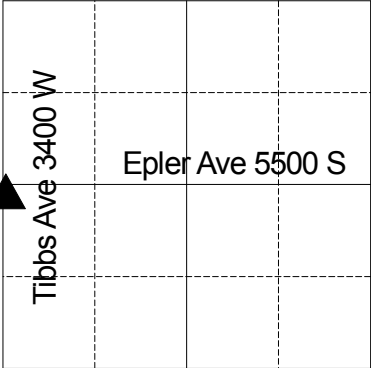

Corner originally set as a post in 1820 by Wm. B. Laughlin with the following witnesses: 4" elm bearing N 33 E 4 links and a 14" hickory bearing S 75 E 47 links (Marion County Atlas p. 5). A survey by R. Mayhew on March 19, 1858 indicates no stone but found corner by original witness tree and set between high roots of elm tree which have grown rapidly (Perry Legal Book p. 35). Corner referenced by Wilcoxon on 9/9/1977 and called a RR spike reset by subdivision plats. Corner referenced by Gries on 9/29/86 and called a RR spike. Corner excavated by Kiste on 6/1/90 and a PK nail was found at surface over RR spike 3" down. Also found an iron spike inside a 2" iron pipe 6" down. The PK nail was .3' west and .4' south of iron pipe. A #205 cast iron Harrison monument was set in place of the 2" iron pipe. Corner referenced by Wilcoxon on 12/22/94 and called a Harrison monument. 8/2/1999 Kiste retied. Corner referenced by Wilcoxon on 12/6/2003 and called a Harrison monument that was raised 3". 8/7/09 Greene retied.

REF.	DISTANCE	DESCRIPTION
1.	145.60'	Mag nail S PwP #1-690 12" up
2.	21.99'	Mag nail w/washer W multi-silver maple 36" up
3.	33.60'	Nail in bottle cap NE PwP #1-689 12" up
4.	53.93'	Road nail E PwP no # 4" up

--